

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number  
**WO 2004/080233 A1**

(51) International Patent Classification<sup>7</sup>: **A45D 26/00**

(21) International Application Number:  
PCT/IL2003/000220

(22) International Filing Date: 13 March 2003 (13.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants and

(72) Inventors: **SHALEV, Pinchas** [IL/IL]; 13 KDUMIM STREET, 44244 KFAR SABA (IL). **AZAR, Zion** [IL/IL]; 17 NURIT STREET, 73142 SHOHAM (IL).

(74) Agents: **FENSTER, Paul et al.**; FENSTER & COMPANY, INTELLECTUAL PROPERTY 2002 LTD., P. O. BOX 10256, 49002 PETACH TIKVA (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ELECTRIC SHAVER WITH HEATED CUTTING ELEMENT AND WIHT DEODORANT DISPENSER**

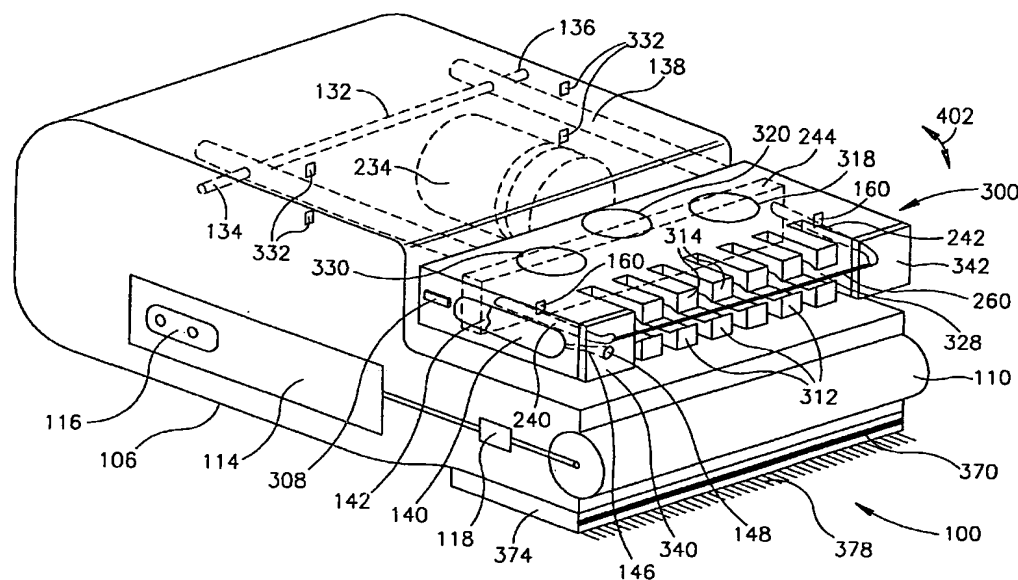

(57) Abstract: A hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising: a) a heat-generating elongate element (260) producing heat sufficient to cut hair, mounted on the portion; and b) a deodorant or perfume dispenser (148) juxtaposed in relation to the portion.

WO 2004/080233 A1

BEST AVAILABLE COPY

## **ELECTRIC SHAVER WITH HEATED CUTTING ELEMENT AND WITH DEODORANT DISPENSER**

The present invention relates to removing hair with a heat element.

### **BACKGROUND OF THE INVENTION**

5       The removal of unwanted hair from the body can be accomplished with mechanized means, for example razors, tweezers or wax, all of which are uncomfortable to use, irritate the skin and/or cause damage to the skin.

10       The use of heated wires or other structures to cut hair from a skin surface has been proposed. However, a heat generator that generates heat of a sufficient magnitude to cut hair and is offset from the skin to prevent skin damage, often leaves behind unwanted stubble.

15       In Peterson, US 3,934,115, parallel metal strips on the upper side of ceramic facing that contacts the skin, are used to cut hair. Hills, in US 2,727,132 and P. Massimo in IT 1201364, use a continuously heated element to burn hair. P.M. Bell in US 558,465, D. Seide in US 0,589,445, G.S. Hills in US 2,727,132, G.L. Johnson in US 3,093,724, Hashimoto in US 5,064,993 and US 6,307,181 B1, F. Solvinto in FR 2531655 and EP 0201189, and E. Michit in 2612381, use a continuously heated wire to burn hair. J.F. Carter in US 3,474,224, provides a circular comb device for burning nose hairs. These references do not appear to provide a means of reducing the hairs to the level of the skin.

20       Vrtaric, in US 4,254,324, provides a heat hair cutting system that is applied only to the tips of the hair to remove the split ends.

25       The present applicants have disclosed a heat-generating system for cutting hair in PCT publications WO 03/009977 and WO 03/009976. The disclosures of these applications are incorporated herein in their entirety by reference. These applications describe methods and devices in which a wire providing pulsed or non-pulsed heat is used to cut hair. As used herein, a heat-generating wire refers to one or more of: metal wires, ribbons or any other type of heat-generating elements capable of generating heat of sufficient magnitude and/or duration to cut hair from an area of skin. In general, all of the configurations of wires, etc. disclosed in either of the above referenced applications. In addition, the structures and methods described herein are usable in or in conjunction with the structures disclosed therein.

30       In the above referenced PCT applications, the hair is severed close to the skin by heating the hair. This severing of the hair may also destroy at least a portion of the hair below the skin. As used herein the term "cut" is used to describe this type of severing or shaving of the hair.

**SUMMARY OF THE INVENTION**

According to an aspect of some embodiments of the present invention, a wire generating heat sufficient to cut hair, is mounted on a structure adapted for cutting hair and vibrated in relation to hair on an area of skin, thereby making multiple passes relative to the hair.

In an exemplary embodiment, the heat-generating wire is vibrated in relation to the structure by a vibrating mechanism. The preferred direction of vibration is generally parallel to the skin of the user and generally perpendicular to the ling dimension of the wires. The mechanism, for example, may comprise a motor having an asymmetrically weighted rotatable component. Other known methods and/or apparatus for causing vibration can also be used.

Optionally, the structure comprises a motion detector that turns the vibrating mechanism on or off in response to motion of the structure (i.e., the frame) along the skin. Alternatively or additionally, the motion detector switches the vibrator on or off when the structure moves above or below a minimum speed in relation to the area. Optionally, the motion detector, in addition to controlling vibrations, controls the duration of the heat period provided by the heat-generating wire. Optionally, the motion detector comprises a mechanical detector or an optical detector. Alternatively, the motion detector may, at least near the threshold modify the temperature or vibrations rather than turn them on or off at the threshold. As used herein the terms "turn-on" or "turn-off" include such more limited modifications.

According to an aspect of some embodiments of the present invention, a structure adapted for cutting hair from an area of skin comprises an opening having a heat-generating wire mounted on a frame therein and two or more elongate skin depressing elements have their long dimension directed toward the opening and the wire. Optionally, the elongate elements are planar with the skin or form an acute angle of less than 15 degrees, optionally less than 5 degrees with the skin (i.e., the plane of the opening). Optionally, the two or more skin depressing elements comprise two or more rows of skin depressing elements, separated by and directed toward a gap in which the wire is located.

Optionally, the wire is mounted on two of more posts in the opening and the opening comprises two or more post protectors positioned to prevent the posts from contacting the skin, for example by having one or more of the skin depressing elements project further from the device than the other elements or by the posts being covered by a solid element.

According to an aspect of some embodiments of the present invention, a structure adapted for cutting hair from an area of skin comprises an opening in which a heat-generating

wire is mounted on a positionally adjustable frame. Optionally, one or more position adjusters are mounted between the frame and the structure. By moving the one or more position adjusters, the position of the heat-generating wire is adjusted with respect to the opening and/or the angle of the wire is adjusted with respect to the plane of the opening.

5        Optionally, the frame is fashioned so that it plugs into mounting sockets and a portion of the frame and/or the sockets are electrically conductive.

         In an exemplary embodiment, the frame comprises two or more posts, each post having a guideway in which the wire is centered. In an exemplary embodiment, at least one of the posts is resilient so that it maintains the wire in tension, for example, during longitudinal  
10        expansion that may occur during heat generation and/or due to pressure as the wire presses against the hair. Optionally, at least one post is relatively flexible when force is applied along the axis of the wire and/or relatively non-flexible when force is applied perpendicular to the axis of the wire.

         According to an aspect of some embodiments of the present invention, a method is  
15        provided for tensioning a heat-generating wire on a frame comprising two resilient posts. Optionally each post has a wire guide channel in which the wire rests or is held. In an exemplary embodiment, the wire is pulled against the guide channels at an angle that causes the posts to bent toward each other. While the posts are bent, the wire is attached to the frame or the posts themselves so that the posts remain bent to maintain the wire in tension after an  
20        external tensioning force is removed. Optionally, the wire is tensioned during the tensioning and attachment process using one or more tension-providing mechanisms. In an embodiment of the invention, the posts are springy or resilient, which terms are used interchangeably herein.

         According to an aspect of some embodiments of the present invention, a structure having a heat-generating wire adapted to vibrate during cutting of hair, comprises a collection  
25        apparatus that collects cut hair. The collection apparatus, for example, comprises an electrostatically charged bar to which the cut hair is attracted. Optionally, the bar includes a comb and/or a brush to aid in bringing the cut hair proximal to the electrostatic charge. Optionally, the collection apparatus comprises a collection area, for example a cavity juxtaposed against the structure.

30        According to an aspect of some embodiments of the present invention, the structure comprises a deodorant dispenser adapted to dispense deodorant in response to heat and/or vibration. Optionally, the dispenser comprises a venturi opening to facilitate deodorant

dispensation in response to vibration. Optionally, the dispenser is adapted to receive a solid and/or fluid deodorant that atomizes and/or vaporizes in response to heat and/or vibrations.

According to an aspect of some embodiments of the present invention, a structure having a heat-generating wire adapted to vibrate during cutting of hair, comprises an odor-reducing filter juxtaposed near the wire, through which odors generated by the wire pass. 5 Optionally, the filter comprises an absorbent material adapted to receive an odor reducing deodorant that further reduces the odors during said passage. In an exemplary embodiment, a rotating impeller is juxtaposed in proximity to the filter to cause passage of the odors through the filter.

10 There is therefore provided, in accordance with an exemplary embodiment of the invention, a hair cutting apparatus comprising:

- an elongate element heated to a temperature capable of cutting hair;
- a vibrating structure, on which said elongate element is mounted; and
- a housing in which the vibrating structure is mounted.

15 Optionally, vibrations of the vibrating structure causes the heat-generating element to pass two or more times over hair as the apparatus is moved slowly along a hair containing area of the skin.

Optionally, the elongate element is mounted between two posts separated by a distance, one or both of the posts comprising a springy material, adapted to tension to the wire.

20 Optionally, each springy post is relatively flexible in response to force applied in a first direction, and relatively non-flexible in response to force applied in a second direction. Optionally, at least a portion of the posts comprises a guideway against which at least a portion of the wire is mounted. Optionally, the posts are electrically conductive. Optionally, the wire is connected to the posts.

25 Optionally, the apparatus includes electrically conductive sockets on the structure adapted to receive the posts.

Optionally, the apparatus includes two or more post stabilizers, which limit the movement of the posts with respect to the housing in a direction perpendicular to an axis of the wire.

30 In an embodiment of the invention, the apparatus includes an eccentric rotating weight that causes the structure to vibrate as the weight rotates. Optionally, the apparatus includes a motion detector that turns the vibrating structure on or off in response to movement of the wire along the area. Optionally, the motion detector turns the vibrating structure on and off in

response to a minimum speed. Optionally, the motion detector provides an indication of speed in excess of a given value. Optionally the indication comprises a visual indication. Optionally, the indication comprises a shutting off of the vibration.

5 In an embodiment of the invention, the motion detector additionally controls the generation of heat on the elongate element. Optionally, the motion detector turns the heat generating element off in response to a measurement of a speed less than a predetermined speed. Optionally, the motion detector turns the heat generating element off in response to a speed greater than a predetermined speed. Optionally, the motion detector comprises at least one of a mechanical motion detector and an optical motion detector.

10 In an embodiment of the invention, the heated element is a wire.

In an embodiment of the invention, the apparatus is a hand held apparatus adapted to be pressed against the skin of a user and cut hair on said skin.

There is further provided, in accordance with an embodiment of the invention, a method of cutting hair from an area of skin with a vibrating heat-generating wire, comprising:

- 15 a) heating an elongate element to a temperature high enough to cut the hair;  
b) placing the heated elongate element against the area; and  
c) vibrating the element in a direction perpendicular to a long axis thereof, so that it makes multiple passes over the area during the placement.

Optionally, the method includes collecting the cut hair. Optionally, the method includes  
20 moving the cut hair into a receptacle.

Optionally, the method includes moving the elongate element along the surface of the skin of an area from which hair is to be removed by hand.

In an embodiment of the invention, the elongate element is a wire.

In an embodiment of the invention, the method includes moving the elongate element  
25 along the surface of the skin of an area from which hair is to be removed by hand.

There is further provided, in accordance with an embodiment of the invention, an A method of manufacturing a tensioned heat-generating wire, comprising:

positioning a wire on two separated posts, at least one of which is resilient in a direction along the wire axis;

30 tensioning the wire in a direction and by an amount sufficient to deform the posts so that the positions of the wire on the posts toward each other; and

fixing the wires in place so that they remain tensioned by the deformed post or posts.

Optionally, when at least one of the posts is provided with a guide for the wire and including:

positioning the at least one wire guide;

pulling at least one ends of the wire extending past the postions of the wires on the post  
5 in a direction having a zero or acute angle with the axis of the post, to bend the post toward the other post.

Optionally fixing comprises fixing the wire to its respective post while it is tensioned.

In an embodiment of the invention the positioning occurs at the tip of the at least one post and the fixing occurs proximal to the tip.

10 There is further provided, in accordance with an embodiment of the invention, a hair cutting head, for use in a hair cutting apparatus and having a portion adapted for contacting an area of skin having hair, the head comprising:

a) at least two rows of elongate skin depressing elements defining an opening in the structure;

15 b) an elongate element situated in the opening and capable of producing heat sufficient to cut hair, when electrified; and

c) a base on which the elements of the head are mounted,

wherein long axes of the skin depressing elements are pointed generally toward the center of the opening.

20 Optionally, the long axes make an angle of less than about 20 degrees with a plane defined by the opening. Optionally, the two or more skin depressing elements are separated by a gap in which the elongate element is located.

In an embodiment of the invention, the elongate element comprises a wire.

In an embodiment of the invention, the head includes one or more position adjuster  
25 mechanisms juxtaposed between the frame and the structure.

There is further provided, in accordance with an embodiment of the invention, a hair cutting head, for use in a hair cutting apparatus and having a portion adapted for contacting an area of skin having hair, the head comprising:

a) a positionally adjustable frame moveably mounted on the structure;

30 b) a heat-generating elongate element capable of producing heat sufficient to cut hair, mounted on the frame near the opening; and

c) one or more position adjuster mechanisms juxtaposed between the frame and the structure.

Optionally, one or more adjuster mechanisms adjust the overall position of the wire with respect to the opening. Alternatively or additionally, the one or more adjuster mechanisms adjusts the angle of the wire with respect to the plane of the opening.

Optionally, the elongate element is a wire.

5        Optionally, the head also includes at least two mounting pins suitable for mounting the head in a hair cutting apparatus said pins being electrically connected to said elongate element.

There is further provided, according an an embodiment of the invention, a hair cutting apparatus including:

a head according to the invention;

10        a power source operative to heat the elongate elements to a temperature sufficient to cut hair.

Optionally, the head also includes at least two mounting pins electrically connected to said elongate element and wherein the apparatus includes matching mounting sockets, electrically connected to said source.

15        Optionally, the apparatus also including means for vibrating the elongate element in a direction perpendicular to a long dimension thereof. Optionally, the means for vibrating is operative to vibrate the head with a motion causing said vibration of the elongate element.

In an embodiment of the invention, the apparatus is a hand held apparatus adapted to be pressed against the skin of a user and cut hair on said skin.

20        There is further provided, in accordance with an embodiment of the invention, a hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising:

a) a heat-generating elongate element producing heat sufficient to cut hair, mounted on the portion; and

25        b) a deodorant or perfume dispenser juxtaposed in relation to the portion.

Optionally, the dispenser is adapted to dispense a deodorant or perfume in response to heat.

Optionally, the elongate element is adapted to vibrate.

30        In an embodiment of the invention, the deodorant dispenser is adapted to dispense a deodorant in response to vibration.

There is further provided, in accordance with an embodiment of the invention, a hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising:



a) a heat-generating element producing heat sufficient to cut hair, mounted on the portion; and

b) a filter mounted on the portion; and

5 c) a pump mounted on the structure, adapted to cause air to flow from the element through the filter.

Optionally, the filter dispenses a deodorant or perfume into air that passes through it.

There is further provided, in accordance with an embodiment of the invention, a hair cutting apparatus comprising a structure adapted for contacting an area of skin having hair, the apparatus comprising:

10 a) a heat-generating elongate element producing heat sufficient to cut hair, mounted on the portion; and

b) an electrostatically charged element adapted for collecting cut hair.

Optionally, the electrostatically charged element further comprises at least one of: a brush, a comb, and a hair collection receptacle.

15 In an embodiment of the invention, the heated element is a wire.

In an embodiment of the invention, the apparatus is a hand held apparatus adapted to be pressed against the skin of a user and cut hair on said skin.

There is further provided, a method of collecting cut hair, comprising:

20 a) cutting hair with a heated elongate element; and

b) collecting the hair cuttings with an electrostatically charged element.

Optionally, the electrostatically charged element comprises at least one of: a brush, a comb, and a hair collection receptacle.

Optionally, the method includes collecting the cut hair into a receptacle.

Optionally, the heated elongate element is a wire.

25 Optionally, the method includes moving the heated elongate element along the surface of the skin of an area from which hair is to be removed by hand.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary non-limiting embodiments of the invention described in the following description, read with reference to the figures attached hereto. In the figures, identical and similar structures, elements or parts thereof that appear in more than one figure are generally labeled with the same or similar references in the figures in which they appear. Dimensions of components and features shown in the figures are chosen primarily for convenience and clarity of presentation and are not necessarily to scale. The attached figures are:

Fig. 1A is a schematic diagram of a structure supporting a heat-generating wire adapted for cutting hair, in accordance with an exemplary embodiment of the invention;

Fig. 1B is a schematic diagram of an alternative structure of Fig. 1A, in accordance with an exemplary embodiment of the invention;

5 Fig. 2 is a schematic diagram of the structure of Fig. 1A including position adjusters, in accordance with an exemplary embodiment of the invention;

Fig. 3 is a partly sectioned isometric view of a vibrating hair cutting unit, in accordance with an exemplary embodiment of the invention; and

10 Fig. 4 is side cross-section of the vibrating hair cutting unit of Fig. 3, shown while cutting a hair, in accordance with an exemplary embodiment of the invention.

#### DESCRIPTION OF EXEMPLARY EMBODIMENTS

Fig. 1A is a simplified schematic diagram of a heat-generating wire 260 suspended on a frame 200, comprising two 240 and 242, in accordance with an exemplary embodiment of the invention. In an exemplary embodiment, posts 240 and 242 comprise wire guideways 120 and 122. Heat-generating wire 260 is optionally centered in guideways 120 and/or 122.

In an exemplary embodiment, posts 240 and 242 are held in position by a strut 244, for example substantially perpendicular to posts 240 and 242. Heat-generating wire 260, for example, is attached at wire ends 270 and 272 to posts 240 and/or 242.

20 In an exemplary embodiment, a conduction post 290 is electrically conductive and is attached to an electrically conductive area 190 while a conduction post 292 is electrically conductive and is attached to an electrically conductive area 192. Further, tension-providing posts 240 and 242 are electrically conductive and connected to conductive areas 190 and 192 respectively so that power provided through posts 290 and 292 causes wire 260 to generate heat.

25 In an exemplary embodiment, one or both of tension posts 240 and 242 are manufactured from a springy electrically conductive material so that when properly positioned they serve to keep heat-generating wire 260 taut during motion across a skin surface. Optionally, posts 240 and/or 242 are relatively flexible so they bend when subjected to a force pushing them towards each other. Optionally, posts 240 and/or 242 are relatively inflexible so 30 they do not bend when subjected to a force pushing them perpendicular to the axis of wire 260.

In an exemplary embodiment, tensioning of wire 260 during manufacture is accomplished, for example, in the following manner, when one or both of the posts are springy:

With the wire placed in guides 120 and 122, wire ends 270 and/or 272 are pulled in a direction 208, with sufficient force and/or at an appropriate angle, with respect to (horizontal) wire 260, to cause posts 240 and 242 to bend toward each. Wire 260 is then attached to posts 240 and/or 242, for example at points 276 and 278 respectively, using solder, electrically  
5 conductive glue (such as conductive epoxy) and/or other connection means known in the art. Mechanical connection such as clamping can also be used. Optionally the clamp is copper or gold coated to provide a slightly conforming and highly conductive mechanical electrical connection. It should be noted that posts guideways 120 and/or 122 may be continually bent toward each other by the tension of wire 260. After attachment to the posts, free ends of the  
10 wires may be removed.

A similar method may be used if only one post is springy (or even if both are springy). In this case, wire 260 is optionally permanently attached to the inflexible post (or optionally to the frame), before or after tensioning. Then the other end of the wire is tensioned as aforesaid and the then attached to the frame or post on which it is mounted. Optionally, especially when  
15 the wire is pre-attached to one of the post, that post does not need a guide.

Optionally, additional tension to wire 260 is provided by one or more coiled springs between posts 240 and/or 242 and wire 260.

Tensioned wire 260, will remain in tension even in the presence of longitudinal expansion that occurs due to heating of wire 260 and/or due to pressure as wire 260 moves in a  
20 direction 402 against a hair 404 (Fig. 4).

One method of pulling wire ends 270 and/or 272 in direction 208 is by attaching wire ends 270 and/or 272 to on or more tension-providing wheels (not shown), positioned, for example on strut 244. By rotating the one or more wheels wire ends 270 and 272 are pulled in direction 208 to tension wire 260. Other methods for pulling wire 260 in direction 208 are  
25 known in the art and include, for example, attaching a spring mechanism and/or pneumatic tensioning device to wire ends 270 and/or 272.

In an exemplary embodiment, conductive post 290 fits into a socket 180 and conductive post 292 fits into a socket 182. A friction fit between sockets 180 and 182 and posts 290 and 292 is provided, for example to allow easy removal of frame 200 from sockets 180 and 182 for  
30 replacement of the entire frame or for cleaning and/or repair of wire 260. Sockets 180 and 182, for example, are conductive and capable of transmitting power from a power source, thereby providing electrical current to heat-generating wire 260 via posts 290 and 292, connection area

190 and 192 and tension posts 240 and 242. It is generally envisioned that the wire, posts and strut mechanism will be replaced when the wire breaks.

In an exemplary embodiment, post supports 160 are positioned against posts 240 and 242 to prevent undue motion in a direction 168. Alternatively or additionally, posts supports  
5 162 are positioned against posts 240 and 242 to prevent undue motion in a direction 166. This assures that motion applied to frame 200 results in desired motion of the wire.

Fig. 1B is a schematic diagram of an alternative structure of Fig. 1A, in accordance with an exemplary embodiment of the invention. In this embodiment, wire 260 passes through rings  
10 150 and 152 in posts 240 and 242 prior to tensioning and attachment to the posts.

Fig. 2 is a schematic diagram of heat-generating wire 260 on frame 200 of Fig. 1A, mounted in vibrating compartment 300 that projects from vibrator posts 130 and 138. In an exemplary embodiment, a vibrator 350 connected to posts 130 and 138, comprises a motor 234 having an off-center weight 232 that causes vibration of vibrator 350 as motor 234 revolves in a direction 230. Alternatively or additionally, vibrator 350 is connected to posts 130 and 138  
15 with a transverse connector 354.

An optional cross pin 132 passes through vibrator posts 130 and 138, allowing their movement around pin 132. As vibrator 350 vibrates, it imparts vibration to vibrator posts 130 and 138, thereby causing heat-generating wire 260 and/or compartment 300 to cyclically move in directions 402.

In cutting hair 404 (Fig. 4), vibration of wire 260, frame 200 and/or compartment 300 facilitates heat-generating wire 260 to make multiple passes over hair 404 while held against a given area of skin 400. Multiple passes of wire 260 increase the cutting efficiency of heat-generating wire 260 during each period it contacts area of skin 400 (i.e., as it is moved, by the user, across the skin surface). The excursion of the wire is between 0.2 and 2 mm, optionally  
20 between 0.5 and 1 mm.

In an exemplary embodiment, vibrating compartment 300, for example comprises a snap-together structure and/or is removably attached to vibrator posts 130 and 138 so that it can be removed for cleaning and/or to allow removal of frame 200 from sockets 180 and 182.

As shown more clearly in Fig. 3, in an exemplary embodiment, compartment 300  
30 comprises a row of skin-depressing elements 312. Skin-depressing elements 312 serve to depress and/or tighten area of skin 400 (Fig. 4), allowing heat-generating wire 260 to cut hair 404 without sinking into skin 400 and possibly dissipating its heat so that it cuts less efficiently and/or burns skin 400.

In an exemplary embodiment of the invention two rows of skin-depressing elements are provided on either side of heat-generating wire 260. Rows of skin depressors are shown in the PCT publications described above, for example, posts or the like. However, the skin depressors shown in the present embodiments differ from those shown in that they comprise elongate elements that whose long axis points generally toward the wire. The present inventors have found that the elongate elements shown herein provide for smoother and more comfortable travel of the shaver along the skin. Other configurations of skin-depressing elements 312, for example, comprising skin-depressing elements 312 at varied heights, angles, and/or planes with respect to skin 400 (Fig. 4), wire 260 and/or compartment 300, are also contemplated in exemplary embodiments of the invention. In preferred embodiments of the invention the long axis of the elongate elements is parallel to the plane of the opening (and thus of the skin) or are at a small (5, 10, 15 or 20 degrees) with respect to the plane.

Alternatively or additionally, post protectors 340 and 342 extend beyond posts 240 and 242 and/or skin-tensing and depressing elements 312. In an exemplary embodiment, post protectors 340 and 342 prevent the heat and/or vibrations from posts 240 and 242 from damaging skin 400 (Fig. 4) or vice-versa, by offsetting the proximate area of skin 400 proximal away from posts 240 and 242.

In an exemplary embodiment, wheels 318, 320 and/or 330 are juxtaposed against strut 244 and are rotatable so that flats 388, 390 and 392 respectively adjust the position of strut 244. Positional adjustments of strut 244 affect the position of wire 260 with respect to skin-depressing elements 312 and hence against area of skin 400. By rotating wheels 318, 320 and/or 330, an operator, for example, controls the closeness of heat-generating wire 260 to skin-depressing elements 312, adjusting the position of wire 260 in a direction 248. Alternatively or additionally, the operator adjusts the angle of wire 260 to skin-depressing elements 312, for example in directions 284 and/or 286.

Using wheels 318, 320 and/or 330 an operator can optimally position and angle of the wire with respect to plane of the end of depressors 312 (or the opening, if rows of depressors are not used).

Fig. 3 is cross-section of a vibrating hair cutting unit 100 having vibrating compartment 300 and a relatively non-vibrating structure 106, with wire 260 positioned within a gap 328. Optionally, skin-depressing elements 312 are elongate elements, positioned on one side of wire 260, pointing toward gap 328. As indicated above, a row of skin depressing elements 314 may comprise elongate elements on the opposite side of wire 260 gap that point toward gap 328.

Optionally, post supports 160 and 162 are positioned against posts 240 and 242 to prevent wire 260 from contacting skin depressing elements 312 and/or 314.

Structure 106, for example, comprises a mechanical motion detector wheel 110 that rotates along a surface, for example area of skin 400 (Fig. 4) and signals a controller 118 that unit 100 is moving in relation to skin 400. In an exemplary embodiment, controller 118 turns vibrator 350 on or off in response to movement, thereby causing vibrator 350 to selectively provide vibrations.

Optionally, motion detector wheel 110 switches vibrator 350 on when unit 100 moves above a minimum speed in relation to skin 400 and switches vibrator 350 off when unit 100 moves below the minimum speed. In exemplary embodiments of the invention, the minimum speed is between 0.2 to 1 cm/second optionally about 0.5 cm/sec. In some embodiments of the invention, the motion detector also indicates when the speed is above a value to cause proper hair removal. In general, this speed is above 3 cm/sec. However, this value may vary depending on the amount diameter and temperature of the wire. Alternatively or additionally, mechanical motion detector 110 comprises an optical motion detector that directs controller 118 to switch vibrator 350 on or off. Optionally, in addition to controlling vibrations, motion detector 110 functions to switch heat generated by wire 260 on or off in response to motion of unit 100 on skin 400. Optionally, the system includes a visual indication of whether the heat and/or vibration are activated, as for example a light. In an embodiment of the invention the light is green when the velocity is in a desired range and red when it is outside this range.

In an exemplary embodiment, a battery 114, for example, provides power to vibrator 350 and/or wire 260. Optionally, battery 114 is rechargeable and, for example, linked by a power input 116 to an external power source, for example a power converter and/or an AC electric power receptacle (not shown). Alternatively or additionally, power input 116 is directly connected to wire 260 and/or vibrator 350 without battery 114 intervening and wire 260 is powered, for example, by AC current.

For clarity of presentation, in these embodiments, connections, for example between tension posts 240 and 242, and/or vibrator 350, and power supply 114, are not shown. However in an exemplary embodiment, a simple arrangement of electrical connectors is used to electrify heat-generating wire 260, vibrator 350 and/or other components associated with unit 100.

In an exemplary embodiment, cross pin 132 has end pins 134 and 136 that attach to structure 106, allowing vibrating compartment 300 to vibrate on posts 130 and 138 in relation to structure 106. One or more movement limiters 332 that abut post 130 and/or 138 to limit

excursion of posts 130 and 138 during vibration of compartment 300 optionally project from housing 106. In an exemplary embodiment, movement limiters 332 comprise compressible material, for example a silicone. In an alternative exemplary embodiment, frame 200 is connected directly to vibrator 350 and compartment 300 and structure 106 remain stationary while heat-generating wire 260 vibrates in relation to skin 400.

In an exemplary embodiment, compartment 300 comprises a container 140 adapted for receiving a fluid and/or solid deodorant 142. Container 140, for example, is joined to a passage 146 having a venturi opening 148. Deodorant 142 atomizes as compartment 300 vibrates and is distributed through venturi opening 148 to the area around wire 260 and/or to skin 400.

Alternatively or additionally, deodorant 142 vaporizes in response to heat provided by heat-generating wire 260. Alternatively or additionally a cover 310 is provided on passage 146 and a user-operated trigger 308 is provided on structure 106 that opens cover 310 to release vapors and/or aerosol from deodorant 142.

No matter what type of dispensation means is used, though, as deodorant 142 atomizes and/or vaporizes, it passes through communication passage 146 to the general area of heat-generating wire 260 and skin 400, thereby masking and/or neutralizing odors generated during cutting of hair. The deodorant (which can be a perfume that masks the smell of the burnt hair), can be provided in different popular scents

In still another alternative exemplary embodiment shown in Fig. 1A, a smoke and/or odor-removing filter 280 is located over ventilation holes 380 in strut 244. A rotatable ventilator prop blade 236 (or other pumping mechanism) rotates to cause odors to be drawn through filter 280. A ventilator passage connecting an input of filter 280 to holes 380 may be provided more complete flow of the air containing the burnt odor to filter 280

Optionally, filter 280 comprises a porous material that absorbs a deodorant, for example a liquid deodorant and an operator places liquid deodorant on at least one area of filter 280. As odors pass over filter 280, they are neutralized and/or replaced with a pleasant fragrance. Optionally, odor-removing filter 280 is located in or adjacent a receptacle 374 that additionally collects cut hair 460 (Fig. 3).

Optionally, blade 236 is activated together with the heat and/or vibration. Optionally, it is deactivated at the same time as one or both of these elements or operates for a somewhat longer time to provide additional odor removal.

Fig. 4 is schematic cross-sectional view of vibrating hair cutting unit 100 cutting hair 404 that is growing from area of skin 400, in accordance with an exemplary embodiment of the invention.

In an exemplary embodiment, an electrostatic outcropping 370 is incorporated into unit 100, for example near motion detector wheel 110 and electrostatically attracts a cut hair 460 cut by heat-generating wire 260. Electrostatic outcropping 370, for example, Teflon will self charge, by friction with the skin, to an extent suitable for attracting the hair. Other charging means and materials can also be used.

Optionally, hair collection receptacle 374 is juxtaposed near outcropping 370 to collect cut hair 460 that accumulates on outcropping 370. Optionally, receptacle 374 has a collection aid 378, comprising a comb or brush, that brings cut hair 460 in proximity of outcropping 370.

In an exemplary embodiment, the current through wire 260 is 0.5 A, though it may vary, depending on the dimensions and/or materials comprising wire 260. In order to cut efficiently, wire 260, for example, reaches a peak temperature of between 700 and 800 °C, when wire 260 is held against hair 404 for 10-100 milliseconds, optionally 25-75 milliseconds.

Lower temperatures, for example 500 °C, can be used to cut hair 404 when wire 260 is held against hair for longer periods of times, for example, 50-150 milliseconds. Higher temperatures, for example 1000 °C, can be used to cut hair 404 when wire 260 is held against hair 404 for shorter periods of time, for example, 5-15 milliseconds.

Power supply 114, for example, produces between 3 and 30 volts and between 0.030 and 5 amperes, depending on the dimensions of wire 260.

In an exemplary embodiment, wire 260 has a diameter of 0.07-0.1 millimeters. Alternatively, wire 260 has a diameter of above 0.1 millimeters, when manufactured from a less flexible and/or weaker material and below 0.07 millimeters when manufactured from a more flexible and/or stronger material.

Wire 260 has a length, for example, of 25-30 millimeters though it could have a length greater than 30 millimeters or less than 25 millimeters, based upon, for example, the amount of hairs 404 that it is designed to cut on each pass.

In an exemplary embodiment, wire 260 is manufactured from Kantaal D, (an alloy of nickel chromium and other metals manufactured by Kantaal Group). Alternative materials for wire 260 include Nichrome or other wire resistance materials



Examples of springy electrically conductive materials used in manufacturing posts 240 and/or 242, include spring steel (SS 302) and beryllium copper. Optionally, the posts are plated with a material such as tin, which improves conductivity to the wire and solderability of the posts.

5 Skin-depressing elements 312 are shown as being straight comb-like pieces, though their shape could vary. Alternatively or additionally, rows of skin-depressing elements 312 with varied designs could be included in a kit provided with unit 100. For example, rows of skin-depressing elements 312 included in the kit could be curved along their length, semi circular or even end in round balls. Use of the various designs of rows of skin depressors 312 could be  
10 based on, for example hair density and/or preference of the operator.

A variety of numerical indicators have been utilized to describe the heat-generating wire. Additionally, a variety of numerical indicators have been utilized to describe structures besides heat-generating wire, including length, diameter and position of skin depressors in relation to the heat-generating wires. It should be understood that these numerical indicators  
15 could vary even further based upon a variety of engineering principles, materials, intended use and designs incorporated into the invention. The reader is further referred to the above referenced PCT applications, which contain numerous variations on many of the features described herein.

It should be further understood that the individual features described herein can be used  
20 together, in the manner above, in a single shaving device. Alternatively, each of the features (or some combination of them) can be used separately, for example, by being added to one of the devices shown in the above referenced PCT publications. Furthermore, it should be understood that the examples given above are exemplary in nature and are not intended to limit the scope of the invention or the claims.

25 The terms "include", "comprise" and "have" and their conjugates as used herein mean "including but not necessarily limited to."

CLAIMS

1. A hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising:
  - 5 a) a heat-generating elongate element producing heat sufficient to cut hair, mounted on the portion; and
  - b) a deodorant or perfume dispenser juxtaposed in relation to the portion.
2. The hair cutting apparatus of claim 1, wherein the dispenser is adapted to dispense a  
10 deodorant or perfume in response to heat.
3. The hair cutting apparatus of claim 1 or claim 2, wherein the elongate element is adapted to vibrate.
- 15 4. The hair cutting apparatus of claim 3, wherein the deodorant dispenser is adapted to dispense a deodorant in response to vibration.
5. A hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising:
  - 20 a) a heat-generating element producing heat sufficient to cut hair, mounted on the portion; and
  - b) a filter mounted on the portion; and
  - c) a pump mounted on the structure, adapted to cause air to flow from the element through the filter.
- 25 6. Apparatus according to claim 5 wherein the filter dispenses a deodorant or perfume into air that passes through it.
7. A hair cutting apparatus comprising a structure adapted for contacting an area of skin  
30 having hair, the apparatus comprising:
  - a) a heat-generating elongate element producing heat sufficient to cut hair, mounted on the portion; and
  - b) an electrostatically charged element adapted for collecting cut hair.

8. Apparatus according to claim 7, wherein the electrostatically charged element comprises at least one of: a brush, a comb, and a hair collection receptacle.
- 5 9. Apparatus according to any of the preceding claims wherein the heated element is a wire.
- 10 10. Apparatus according to any of the preceding claims wherein the apparatus is a hand held apparatus adapted to be pressed against the skin of a user and cut hair on said skin.
- 10 11. A method of collecting cut hair, comprising:  
a) cutting hair with a heated elongate element; and  
b) collecting the hair cuttings with an electrostatically charged element.
- 15 12. A method according to claim 11 wherein the electrostatically charged element comprises at least one of: a brush, a comb, and a hair collection receptacle.
13. A method according to claim 11 or claim 12 including collecting the cut hair into a receptacle.
- 20 14. A method according to any of claims 11-13 wherein the heated elongate element is a wire.
15. A method according to any of claims 11-14 and including moving the heated elongate  
25 element along the surface of the skin of an area from which hair is to be removed by hand.

1/4

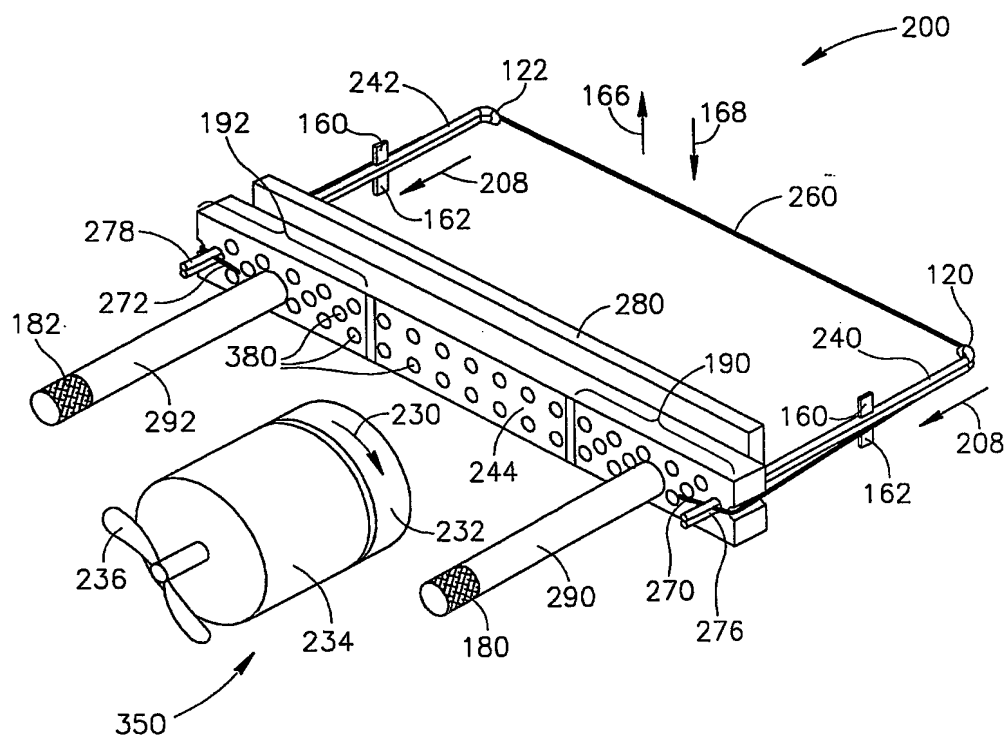


FIG.1A

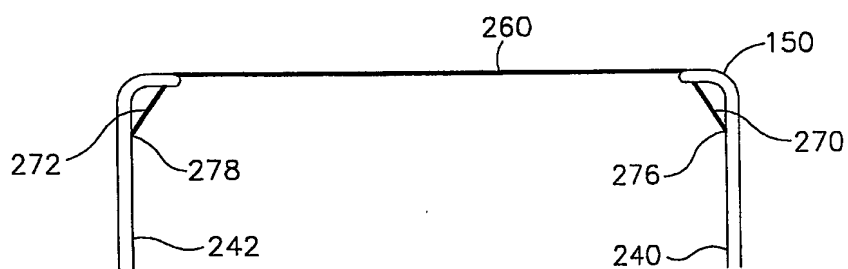


FIG.1B

2/4

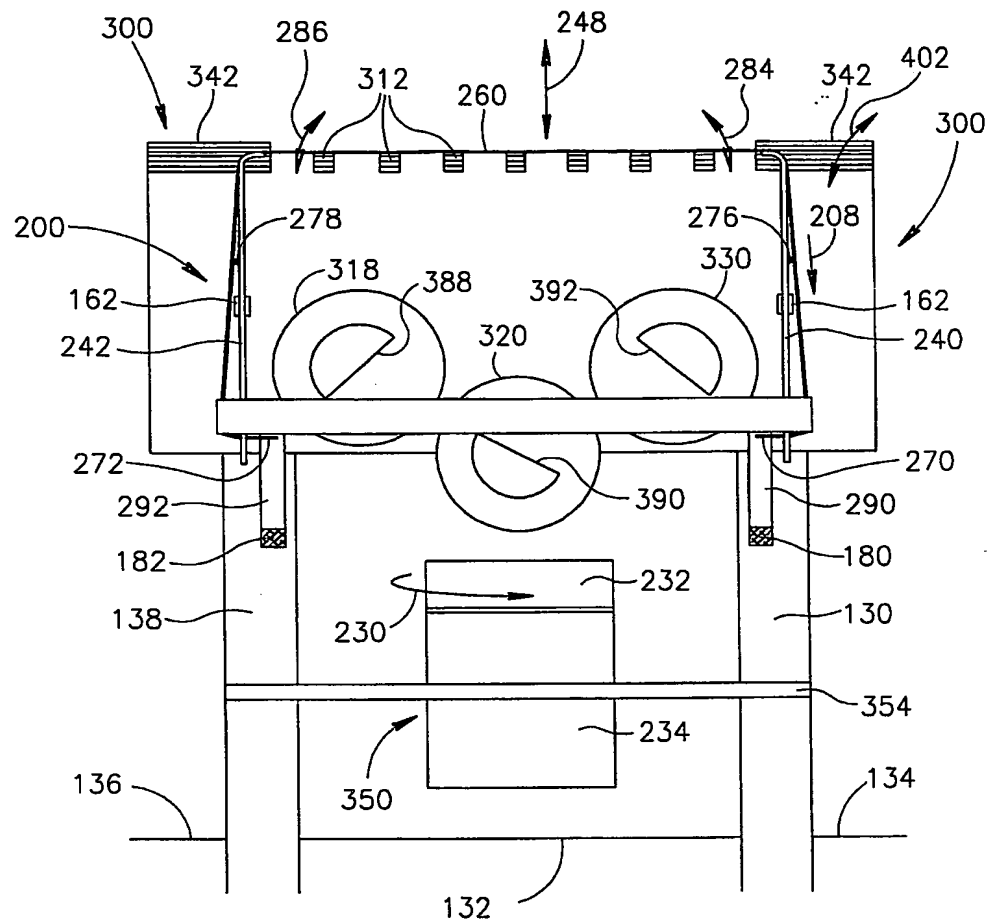


FIG.2

3/4

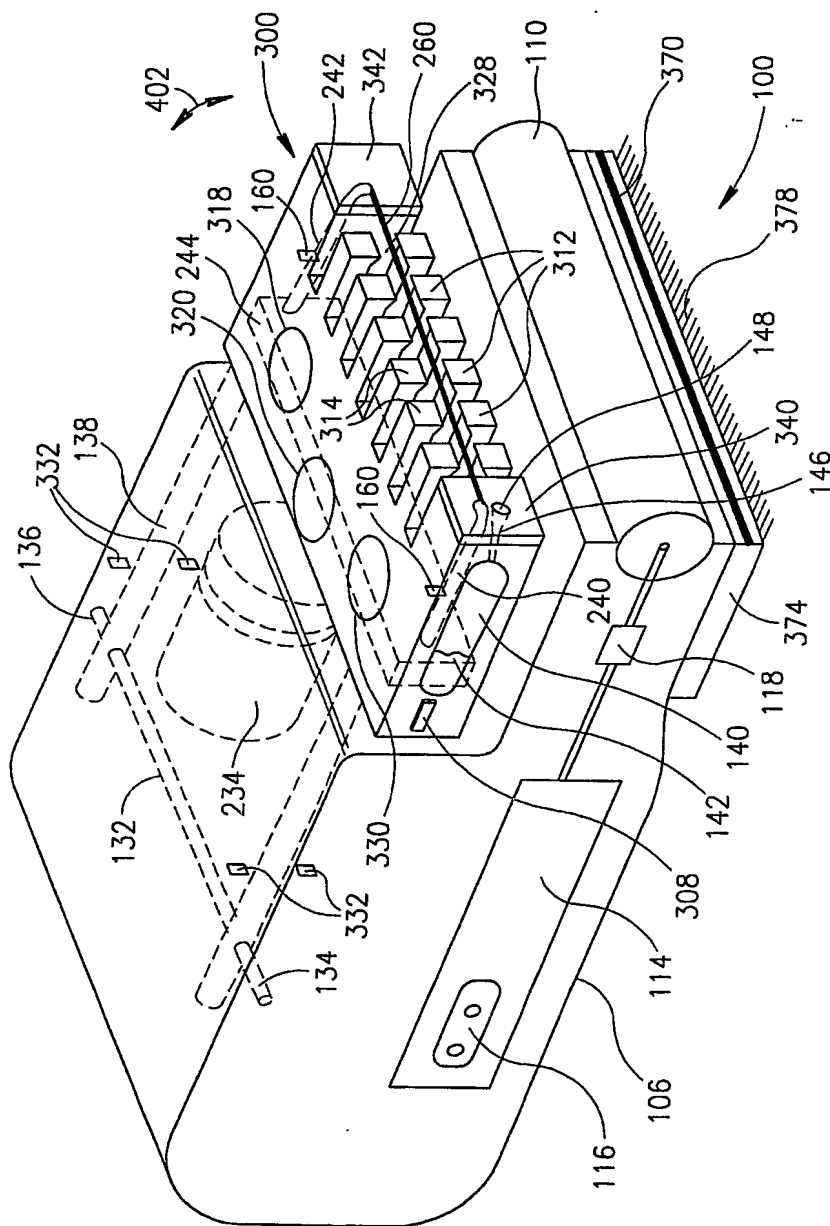


FIG. 3

4/4

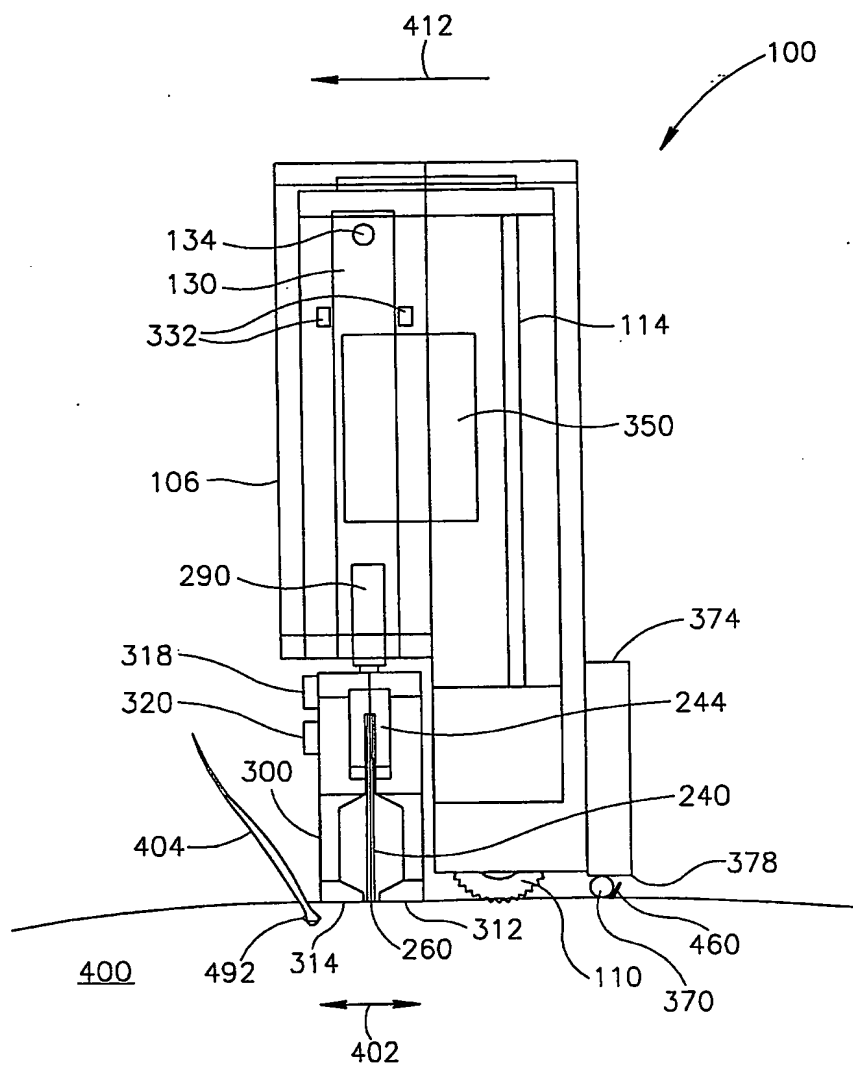


FIG. 4

# INTERNATIONAL SEARCH REPORT

International Application No

P/IL 03/00220

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A45D26/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A45D B26B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 134 960 A (NICHOLAS TESTI) 1 November 1938 (1938-11-01) the whole document ---	1
A	US 2002/004986 A1 (HACZEK WERNER ET AL) 17 January 2002 (2002-01-17) the whole document ---	1
A	WO 99 19123 A (KONINKL PHILIPS ELECTRONICS NV ; PHILIPS SVENSKA AB (SE)) 22 April 1999 (1999-04-22) the whole document ---	1
A	FR 2 612 381 A (MICHIT EMILE) 23 September 1988 (1988-09-23) page 2, line 29 -page 3, line 4; figures 3,4 --- -/--	5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

6 October 2003

Date of mailing of the international search report

15/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Maier, M



# INTERNATIONAL SEARCH REPORT

International Application No  
 /IL 03/00220

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 421 216 A (ANNA OTTO KONRAD) 14 January 1969 (1969-01-14) the whole document ---	7
X	GB 658 068 A (LEO WILLIAMS) 3 October 1951 (1951-10-03) page 1, line 37 -page 2, line 6; figures 1-6 -----	11-15

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IL 03/00220

### Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-4

A hair-cutting apparatus comprising a heat-generating elongate element producing heat sufficient to cut hair, and a deodorant or perfume dispenser.

2. Claims: 5-6

A hair-cutting apparatus comprising a heat-generating elongate element producing heat sufficient to cut hair, and a filter and an air pump.

3. Claims: 7-10

A hair-cutting apparatus comprising a heat-generating elongate element producing heat sufficient to cut hair, and an electrostatically charged element adapted for collecting cut hair.

4. Claims: 11-15

A method of collecting cut hair, comprising a) cutting hair with a heated elongate element; and b) collecting the hair cuttings with an electrostatically charged element.

# INTERNATIONAL SEARCH REPORT

International Application No

P/IL 03/00220

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2134960	A	01-11-1938	NONE
US 2002004986	A1	17-01-2002	DE 19907025 A1 31-08-2000
			AT 235995 T 15-04-2003
			CN 1104309 B 02-04-2003
			DE 59904892 D1 08-05-2003
			WO 0048798 A1 24-08-2000
			EP 1152870 A1 14-11-2001
			JP 2002537044 T 05-11-2002
			PT 1152870 T 31-07-2003
WO 9919123	A	22-04-1999	WO 9919123 A1 22-04-1999
FR 2612381	A	23-09-1988	FR 2612381 A1 23-09-1988
US 3421216	A	14-01-1969	DE 1279507 B 03-10-1968
			AT 252063 B 10-02-1967
			CH 446117 A 31-10-1967
			FR 1504064 A 01-12-1967
			GB 1092800 A 29-11-1967
			NL 6615402 A 05-05-1967
GB 658068	A	03-10-1951	NONE

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number  
WO 2004/080233 A1

(51) International Patent Classification<sup>7</sup>: A45D 26/00

(21) International Application Number:  
PCT/IL2003/000220

(22) International Filing Date: 13 March 2003 (13.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): RADI-  
ANCY INC. [US/US]; 40 Ramland Road South, Orange-  
burg, NY 10962 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SHALEV, Pinchas  
[IL/IL]; 13 KDUMIM STREET, 44244 KFAR SABA  
(IL). AZAR, Zion [IL/IL]; 17 NURIT STREET, 73142  
SHOHAM (IL).

(74) Agents: FENSTER, Paul et al.; FENSTER & COM-  
PANY, INTELLECTUAL PROPERTY 2002 LTD., P. O.  
BOX 10256, 49002 PETACH TIKVA (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:


— with international search report

(48) Date of publication of this corrected version:

23 December 2004

[Continued on next page]

(54) Title: ELECTRIC SHAVER WITH HEATED CUTTING ELEMENT AND WITH DEODORANT DISPENSER

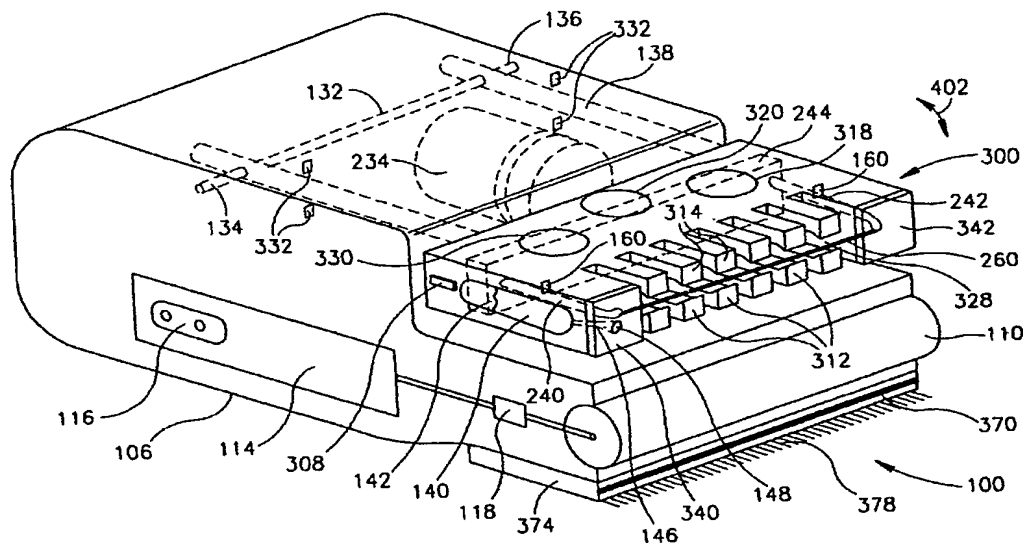

(57) Abstract: A hair cutting apparatus comprising a structure having a portion adapted for contacting an area of skin having hair, the apparatus comprising: a) a heat-generating elongate element (260) producing heat sufficient to cut hair, mounted on the portion; and b) a deodorant or perfume dispenser (148) juxtaposed in relation to the portion.

WO 2004/080233 A1

WO 2004/080233 A1



**(15) Information about Correction:**

see PCT Gazette No. 52/2004 of 23 December 2004, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**